

DECLARACIÓN AMBIENTAL DE PRODUCTO ENVIRONMENTAL PRODUCT DECLARATION

DAPcons®. 100.017

According to ISO 14025
and UNE EN 15804 + A1



COL·LEGI D'APARELLADORS,
ARQUITECTES TÈCNICS
I ENGINYERS D'EDIFICACIÓ
DE BARCELONA

Product

MULTI-WALL CELLULAR POLYCARBONATE SYSTEM

Owner



Product description

The multi-wall cellular polycarbonate system product is a modular system made up of coextruded polycarbonate panels, aluminium profiles and accessories including as well products from the ARCOPLUS and ARCOWALL range.

PCR Reference

RCP 100 Productos de Construcción en general versión 2 - 29.02.2016

Production plant

DOTT. GALLINA S.R.L.
Strada Carignano 104
10040 La Loggia (Torino) Italy



Validity

From: 07/05/2020 To: 07/05/2025

The validity of DAPcons®.100.017 is subject to the conditions of DAPcons® regulations. The relevant version of this DAPcons® is included in the register kept by the CAATEEB; for more information, consult the Program Operator website: www.csostenible.net

ENVIRONMENTAL PRODUCT DECLARATION

MULTI-WALL CELLULAR POLYCARBONATE SYSTEM

EXECUTIVE SUMMARY

PROGRAMME OPERATOR DAPconstrucción® Environmental product declarations of construction sector www.csontenible.net	
Administrator of Programme Operator Col·legi d'Aparelladors, Arquitectes Tècnics de Barcelona i Enginyers de l'Edificació (CAATEEB) Bon Pastor, 5 · 08021 Barcelona www.apabcn.cat	
Owner of the Declaration AISLUX S.A. Polígono La Catalana. Ctra de Vicalvaro a estación O'Donell, 5 - 28032 Madrid	
Declaration carried out by: LEADER ENGINEERING AND CONSULTING S.L.U. C/ Entença 227 - 231, Local 1º - 08029 Barcelona	
Declaration Number DAPcons@100.017	
Declared Product Multi-wall cellular polycarbonate system	
Product description Multi-wall cellular polycarbonate system product is a modular system made up of coextruded polycarbonate panels, aluminium profiles and accessories including as well products from the ARCOPLUS and ARCOWALL range.	
Registration date 07/05/2020	
Validity This verified declaration authorises the owner to use the DAPcons® eco-label logo. The declaration is applicable exclusively to the product in question and for five years as of the date of registration. The responsible for the information contained in this declaration is: AISLUX S.A.	
Endorsed by CAATEEB Mr. Celestí Ventura Cisternas, President of the CAATEEB	Endorsed by authorised verifier Mr. Ferran Pérez Ibañez, Verifier accredited by the DAPconstruction® Program
This environmental product declaration complies with standards ISO 14025 and UNE EN 15804 + A1 and contains information of an environmental nature about the life cycle of Multi-wall cellular polycarbonate system manufactured by DOT. GALLINA S.L.R at its plant in Italy. This declaration is based on the document RCP100 Productos de Construcción en general, version 2 - 29.02.2016. The environmental product declaration (DAPcons®) may not be comparable to another EPD if it is not based on the UNE EN 15804 + A1	

ENVIRONMENTAL PRODUCT DECLARATION

1. PRODUCT DESCRIPTION AND APPLICATION

Multi-wall cellular polycarbonate system is a modular system made up of cellular polycarbonate coextruded panels, aluminium profiles and accessories and includes ARCOPLUS and ARCOWALL products. The design is suitable for use in vertical surfaces, facades and covers. Stands out for its lightness, light transmission, isolation and ease of installation (easy to install). It has a great resistance to ultraviolet rays, hail and any kind of impact.

Studied Products and included in the DAP:

ARCOPLUS: 324, 344X, 547, 549, 625, 626, 684, 5513, 6104, 6124, 6166, 6410, 9207, 9257 y 9327
ARCOWALL 5613

Twelve reference models have been adopted in this DAP. For each of them, their results are representative for other models in the range since the difference between the impacts of their respective life cycles is less than 10%.

Reference models adopted:

ARCOPLUS: 324, 344X, 547, 684, 5513, 6104, 6124, 6166, 9207, 9257 y 9327
ARCOWALL 5613



Technical characteristics of cellular polycarbonate of the products

ARCOPLUS	324	344x	547	549	625	626	684	5513
COMPOSITION	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
THICKNESS	20 mm	40 mm	40 mm	40 mm	20 mm	20 mm	8 mm	50 mm
STRUCTURE	4 walls	4 walls	7 walls	9 walls	5 walls	6 walls	4 walls	13 walls
EFFECTIVE MODULAR WIDTH	333 mm	333 mm	500 mm	500 mm	667 mm	600 mm	600 mm	500 mm
PANEL LENGTH	No limits	No limits	No limits	No limits	No limits	No limits	No limits	No limits
DENSITY (ISO 1183)	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³
THERMAL INSULATION U	1,8 W/m ² K	1,7 W/m ² K	1,1 W/m ² K	1,0 W/m ² K	1,7 W/m ² K	1,7 W/m ² K	3,0 W/m ² K	0,86 W/m ² K
FIRE REACTION (UNE EN 13501-1)	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0
ACOUSTIC INSULATION Rw (ISO 717-1)	16 dB	19 dB	21 dB	21 dB	16 dB	20 dB	18 dB	22 dB
LINEAR THERMAL EXPANSION (EN 16153)	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C
UV RAYS PROTECTION	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion
USEFUL LIFE OF CELLULAR POLYCARBONATE	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years
REPRESENTATIVE MODEL	324	344x	547	547	324	6166	684	5513

ARCOPLUS	6104	6124	6166	6410	9207	9257	9327	ARCOWALL 5613
COMPOSITION	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
THICKNESS	10 mm	12 mm	16 mm	40 mm	20 mm	25 mm	32 mm	60 mm
STRUCTURE	4 walls	4 walls	6 walls	10 walls	7 walls	7 walls	7 walls	13 walls
EFFECTIVE MODULAR WIDTH	600 mm	600 mm	600 mm	600 mm	900 mm	900 mm	900 mm	500 mm
PANEL LENGTH	No limits	No limits	No limits	No limits	No limits	No limits	No limits	No limits
DENSITY (ISO 1183)	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³	1.200 Kg/m ³
THERMAL INSULATION U	2,7 W/m ² K	2,5 W/m ² K	1,9 W/m ² K	0,94 W/m ² K	1,7 W/m ² K	1,4 W/m ² K	1,3 W/m ² K	0,74 W/m ² K
FIRE REACTION (UNE EN 13501-1)	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0	Euroclass B s1 d0
ACOUSTIC INSULATION Rw (ISO 717-1)	18 dB	19 dB	20 dB	21 dB	20 dB	20 dB	21 dB	22 dB
LINEAR THERMAL EXPANSION (EN 16153)	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065mm/m°C	0,065 mm/m°C
UV RAYS PROTECTION	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion	Coextrusion
USEFUL LIFE OF CELLULAR POLYCARBONATE	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years
REPRESENTATIVE MODEL	6104	6124	6166	9327	9207	9257	9327	ARCOWALL 5613

2. LIFE CYCLE PHASES DESCRIPTION

2.1. Manufacture (A1, A2 and A3)


Raw materials (A1 and A2)

The A1 module includes the raw and auxiliary materials supply. The cellular polycarbonate is produced in the DOTT. GALLINA S.R.L. factory in La Loggia (Torino-Italy). To produce this product it has been considered the following components: granulated polycarbonate, pigments, standard additives and polyethylene. The auxiliary materials are aluminium and rubber profiles which are externally produced.

The A2 module includes raw and auxiliary materials transportation to the DOTT. GALLINA S.R.L. factory in La Loggia (Torino-Italy). It has been provided the distance and kind of lorry for each raw and auxiliary material.

Manufacturing (A3)

The multi-wall cellular polycarbonate plate is manufactured by an extrusion process which begins with the granulated polycarbonate in a hopper. A heating camera softens thermoplastic polymers which made them flow through an helical endless screw in a continuous process until a discharg nozzle where a matrix shapes them. A second extrusion process, coupled to the principal, ensures the coextrusion of ultraviolet protection of its external face. Later, once the plate exits the matrix, a calibration system gives it the final dimension and at the same time cools it reaching the solidity and stability desired. Finally, a protection film is applied and the plate is cut at the demanded measurement through a hot shears knife. To close the alveolus it is used thermofusion or microperforated aluminium tape. For packaging it is used paperboard, polyethylene and wood pallets.

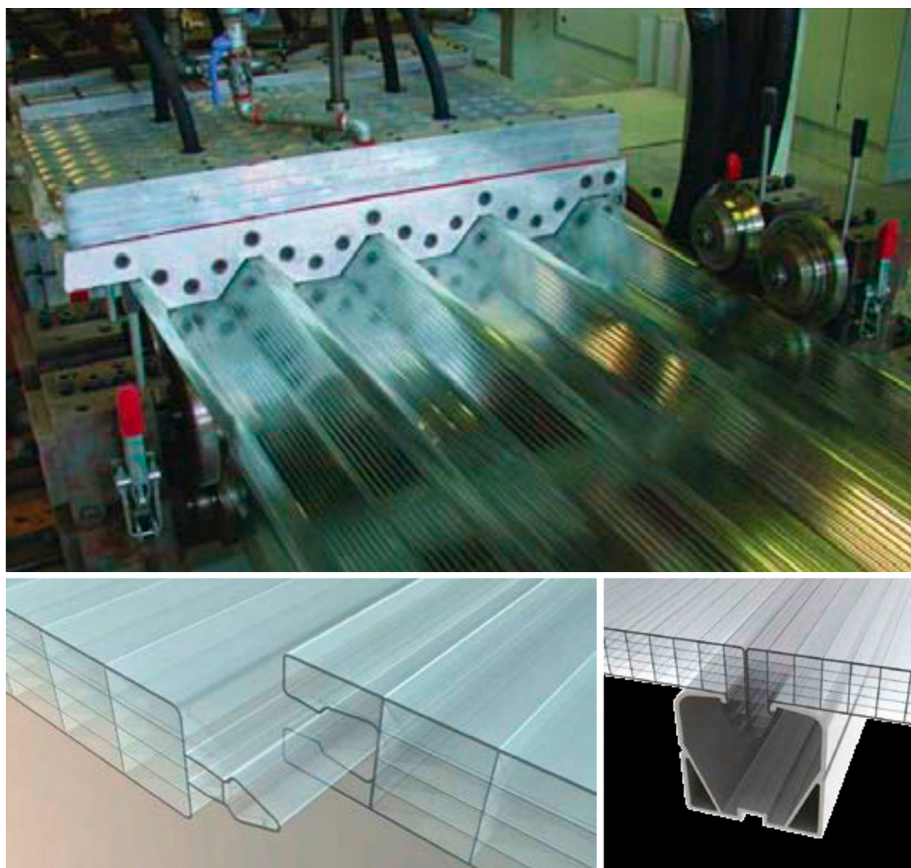

2.2. Construction (A4 and A5)

Product transport to the building site (A4)

The product is transported from the factory DOTT. GALLINA S.R.L. in La Loggia (Torino-Italy) to the building site where it will be installed.

Table 1. Transport scenarios of product to the building site

Destination	Type of transport	Percentage (%)	Average Km
Spain	Lorry EURO VI 16 Ton - 32 Ton Diesel Consumption 25 L/100 Km	95	1.300
Europe	Lorry EURO VI 16 Ton - 32 Ton Diesel Consumption 25 L/100 Km	5	2.030
Rest of the world			
		Total 100%	

Construction and instalation process (A5)

The product will be installed manually. It includes stainless steel hardware and the energy that will be needed for its installation. The management of product losses(1,5%) and packaging waste (100%) generated during the process are taken into account. Product losses: polycarbonate (Plastic Europe 2018): 42% recycling, 19% energy recovery and 39% landfill; aluminium (European Aluminium Association): 95% recycling and 5% landfill; rubber profiles: 100% landfill. Packaging waste: plastic waste (Plastic Europe 2018): 42% recycling, 40% energy recovery and 18% landfill; paperboard (it is considered like plastic waste); wood: 100% recycling. It is also considered the transport: 50 Km by lorry EURO VI diesel.

2.3. Product use (B1-B7)

It has been studied that there is no product impact in the modules B1-USES, B2-MAINTENANCE, B3-REPAIR, B5-REHABILITATION, B6-OPERATIONAL ENERGY USES and B7-OPERATIONAL WATER USES during the 50 years of the reference period.

B4-SUBSTITUTION. It will be necessary one substitution during the 50 years of the reference period.

2.4. End-of-life (C1-C4)

C1-DECONSTRUCTION AND DEMOLITION: Once ended the product life, it will be removed either as a substitution, rehabilitation or demolition of the building. If it was a substitution, the desinstallation impacts would be the same as the installation ones. If it was a rehabilitation or demolition of the building, the desinstallation impacts are minimum.

C2-TRANSPORTATION: All waste generated by the end of the product life will be transported by lorry EURO VI for an estimated distance of 50 Km.

C3-WASTE MANAGEMENT FOR REUSE, RECOVERY AND RECYCLING:

- Recycling: 42% polycarbonate (Plastic Europe 2018), 95% aluminium (European Aluminium Association) and 100% stainless steel.

C4-FINAL DISPOSAL:

- Controlled landfill: 39% polycarbonate (Plastic Europe 2018) and 5% aluminium (European Aluminium Association).

2.5. Benefits and loads beyond the system boundary (D)

It has been taken into account the enviromental burdens and benefits generated by the recycling and energy recovery of packaging waste produced during the installation stage.

It has been taken into account the enviromental burdens and benefits generated by the recycling and energy recovery of cellular polycarbonate and aluminium profiles waste during the stages of installation, use and end of product life.

3. LIFE CYCLE ASSESSEMENT

This statement of life cycle assesement is based on the ISO 14040 and ISO 14044-2006 norms and they meet the requirements of the UNE-EN 15804:2012 +A1 2014 norm and Product Category Rules RCP 100 - General Building Products 2-29.02.2016 from DAPconstruction and it is the type "from the cradle to the grave", that is, it covers all stages until the end of the product life. It has been used the software LCA Simapro 8.5 with the impact model CML IA 2001 version 3.05 and it has been used specific data from DOTT. GALLINA S.R.L. factory in La Loggia (Torino-Italy) corresponding to 2018 for the inventory of the manufacturing stage. For the rest of stages it has been used data given by AISLUX S.A. and generic data from the database Ecoinvent version 3.4 2017 with great international prestige.

3.1. Declared unit

The functional unit is 1 m2 of translucent multi-wall cellular polycarbonate cladding installed on a building which will have 50 years of useful life in a geografical and technological environment in Europe 2019.

3.2. System boundary

Table 2. Declared modules

Product stage			Construction Process Stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw materials supply	Transport	Manufacturing	Transport	Construction – Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy use	Operational water use	De-construction	Transport	Waste processing	Disposal	Reuse, recovery, recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x

X = Included in LCA MND = Module Not Declared

3.3. Data analysis for the life cycle (ACV)

Table 3. Indicators of the environmental impact

ARCOPLUS® 324 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 324 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	2.98E-05	Kg Sb-eq	2.04E-05	69%	2.33E-06	8%	1.97E-06	7%	5.08E-06	16%	0	6.91E-08	<1%	0	<1%	3.50E-08	<1%	-1.07E-06	
Abiotic Resources Dep potential (fossil fuels)	5.07E+02	MJ	2.65E+02	53%	1.13E+01	2%	6.63E+00	1%	2.23E+02	43%	0	3.36E-01	<1%	0	<1%	3.96E-01	<1%	-1.80E+02	
Global warming	4.55E+01	Kg CO ₂ -eq	2.21E+01	50%	7.51E-01	2%	7.90E-01	2%	2.08E+01	45%	0	2.23E-02	<1%	0	3%	1.18E+00	<1%	-1.57E+01	
Ozone Depletion potential	9.29E-07	Kg CFC 11-eq	6.20E-07	77%	1.39E-07	15%	3.82E-08	5%	1.19E-07	<1%	0	4.14E-09	<1%	0	<1%	4.76E-09	<1%	4.13E-07	
Photochemical ozone formation, POCP	7.47E-03	Kg C ₂ H ₄ -eq	3.93E-03	53%	1.13E-04	2%	1.03E-04	1%	3.33E-03	44%	0	3.37E-06	<1%	0	<1%	5.56E-06	<1%	-2.24E-03	
Acidification potential	1.38E-01	Kg SO ₂ -eq	7.30E-02	51%	1.76E-03	1%	2.02E-03	1%	5.99E-02	43%	0	5.22E-05	<1%	0	<1%	2.28E-04	<1%	-3.05E-02	
Eutrophication	1.18E-02	Kg PO ₄ ³⁻ -eq	6.11E-03	55%	2.31E-04	2%	2.44E-04	2%	4.79E-03	40%	0	6.86E-06	<1%	0	<1%	7.20E-05	<1%	-1.64E-03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 324 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.06E+01	MJ	1,88E+01	92%	1,71E-01	<1%	4,45E-01	2%	1,22E+00	5%	0	5,07E-03	<1%	0	<1%	1,04E-02	<1%	3,84E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of renewable primary energy	2.06E+01	MJ	1,88E+01	92%	1,71E-01	<1%	4,45E-01	2%	1,22E+00	5%	0	5,07E-03	<1%	0	<1%	1,04E-02	<1%	3,84E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	5.52E+02	MJ	2,65E+02	53%	1,13E+01	2%	6,63E+00	1%	2,43E+02	43%	0	3,36E-01	<1%	0	<1%	4,28E-01	<1%	-1,80E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	5.52E+02	MJ	2,65E+02	53%	1,13E+01	2%	6,63E+00	1%	2,43E+02	43%	0	3,36E-01	<1%	0	<1%	4,28E-01	<1%	-1,80E+02
Total use of primary energy	1.23E+03	MJ	6,51E+02	55%	2,50E+01	2%	2,44E-04	2%	4,79E-03	40%	0	6,86E-06	<1%	0	<1%	7,20E-05	<1%	-1,64E-03
Use of secondary materials	5.20E-01	Kg	2,60E-01	50%	0	0%	0	0%	2,60E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	7.92E-02	m³	4,13E-02	52%	2,19E-03	3%	1,61E-03	2%	3,20E-02	40%	0	6,50E-05	<1%	0	2%	1,72E-04	<1%	-1,03E-02

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 324 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Hazardous waste disposed	8.39E-05	Kg	6.41E-05	69%	7.45E-06	9%	3.90E-06	5%	7.43E-06	9%	0	2.21E-07	<1%	0	0%	8.20E-07	<1%	1.01E-04
Non-hazardous waste disposed	4.35E+00	Kg	8.22E-01	19%	5.60E-01	13%	1.94E-01	5%	1.67E+00	39%	0	1.66E-02	<1%	0	0%	1.04E-02	<1%	1.80E-01
Radioactive waste disposed	3.27E-04	Kg	1.61E-04	49%	7.90E-05	24%	1.84E-05	7%	6.42E-05	20%	0	2.34E-06	<1%	0	0%	1.71E-06	<1%	5.93E-04
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Materials for recycling	4.62E-01	Kg	0	0%	0	0%	2.31E-01	50%	2.31E-01	50%	0	0	0%	0	0%	0	0%	0
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0

A1. Raw materials supply
A2. Transport
A3 Manufacturing Product
A4. Transport
A5. Construction – Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decosntruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 344x Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 344x relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	4.12E-05	Kg Sb-eq	2.86E-05	74%	3.23E-06	8%	2.11E-06	5%	7.23E-06	12%	0	9.86E-08	<1%	0	<1%	4.97E-08	<1%	-1.53E-06	
Abiotic Resources Dep potential (fossil fuels)	7.11E+02	MJ	3.69E+02	53%	1.57E+01	2%	8.28E+00	1%	3.17E+02	44%	0	4.79E-01	<1%	0	<1%	5.62E-01	<1%	-2.57E+02	
Global warming	6.43E+01	Kg CO ₂ -eq	3.12E+01	50%	1.04E+00	2%	9.42E-01	2%	2.95E+01	44%	0	3.18E-02	<1%	0	3%	1.68E+00	<1%	-2.24E+01	
Ozone Depletion potential	1.30E-06	Kg CFC 11-eq	8.76E-07	77%	1.93E-07	17%	4.31E-08	4%	1.70E-07	<1%	0	5.90E-09	<1%	0	<1%	6.76E-09	<1%	5.81E-07	
Photochemical ozone formation, POCP	1.06E-02	Kg C ₂ H ₄ -eq	5.53E-03	53%	1.57E-04	2%	1.28E-04	1%	4.74E-03	44%	0	4.81E-06	<1%	0	<1%	7.90E-06	<1%	-3.19E-03	
Acidification potential	1.95E-01	Kg SO ₂ -eq	1.03E-01	54%	2.44E-03	1%	2.48E-03	1%	8.53E-02	43%	0	7.46E-05	<1%	0	<1%	3.25E-04	<1%	-4.37E-02	
Eutrophication	1.67E-02	Kg PO ₄ ³⁻ -eq	8.59E-03	55%	3.20E-04	2%	2.84E-04	2%	6.82E-03	41%	0	9.79E-06	<1%	0	<1%	1.02E-04	<1%	-2.35E-03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 344x relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.80E+01	MJ	2.55E+01	91%	1.73E+01	<1%	5.41E+01	2%	1.74E+00	6%	0	5.27E+03	<1%	0	<1%	1.48E+02	<1%	5.45E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use a renewable primary energy	2.80E+01	MJ	2.55E+01	91%	1.73E+01	<1%	5.41E+01	2%	1.74E+00	6%	0	5.27E+03	<1%	0	<1%	1.48E+02	<1%	5.45E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	8.35E+02	MJ	4.36E+02	91%	1.72E+01	<1%	9.56E+00	2%	3.70E+02	6%	0	5.26E+01	<1%	0	<1%	6.25E+01	<1%	-2.57E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	8.35E+02	MJ	4.36E+02	91%	1.72E+01	<1%	9.56E+00	2%	3.70E+02	6%	0	5.26E+01	<1%	0	<1%	6.25E+01	<1%	-2.57E+02	
Total use of primary energy	8.63E+02	MJ	4.62E+02	54%	1.74E+01	2%	1.01E+01	1%	3.72E+02	42%	0	5.31E+01	<1%	0	<1%	6.40E+01	<1%	-2.02E+02	
Use of secondary materials	7.40E+01	Kg	3.70E+01	50%	0	0%	0	0%	3.70E+01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	1.11E+01	m³	5.77E+02	52%	3.03E+03	3%	1.89E+03	2%	4.55E+02	41%	0	9.28E+05	<1%	0	2%	2.43E+04	<1%	-1.45E+02	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 344x relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	1.16E+04	Kg	8.95E+05	69%	1.03E+05	8%	4.35E+06	5%	1.06E+05	2%	0	3.16E+07	<1%	0	<1%	1.17E+06	<1%	1,45E+04	
Non-hazardous waste disposed	6.07E+00	Kg	1.15E+00	19%	7.75E+01	19%	2.10E+01	5%	2.37E+00	7%	0	2.37E+02	<1%	0	<1%	1.54E+00	38%	2,55E+01	
Radioactive waste disposed	4.49E+04	Kg	2.22E+04	50%	1.09E+04	24%	1.99E+05	4%	9.13E+05	19%	0	3.35E+06	<1%	0	<1%	2.43E+06	<1%	8,44E+04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	4.82E+01	Kg	0	0%	0	0%	2.41E+01	50%	2.41E+01	50%	0	0	0%	0	88%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 547 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 547 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	4.23E-05	Kg Sb-eq	2.89E-05	68%	3.50E-06	9%	2.12E-06	5%	7.82E-06	19%	0	1.06E-07	<1%	0	<1%	5.37E-08	<1%	-1.65E-06	
Abiotic Resources Dep potential (fossil fuels)	7.75E+02	MJ	4.05E+02	52%	1.70E+01	2%	8.87E+00	1%	3.43E+02	43%	0	5.13E-01	<1%	0	<1%	6.06E-01	<1%	-2.77E+02	
Global warming	6.98E+01	Kg CO ₂ -eq	3.39E+01	50%	1.13E+00	2%	1.10E+00	2%	3.19E+01	44%	0	3.41E-02	<1%	0	3%	1.82E+00	<1%	-2.42E+01	
Ozone Depletion potential	1.36E-06	Kg CFC 11-eq	9.04E-07	76%	2.09E-07	18%	4.43E-08	4%	1.84E-07	<1%	0	6.32E-09	<1%	0	<1%	7.29E-09	<1%	6.35E-07	
Photochemical ozone formation, POCP	1.14E-02	Kg C ₂ H ₄ -eq	6.00E-03	53%	1.70E-04	2%	1.36E-04	1%	5.12E-03	44%	0	5.15E-06	<1%	0	<1%	8.52E-06	<1%	-3.44E-03	
Acidification potential	2.11E-01	Kg SO ₂ -eq	1.12E-01	53%	2.64E-03	1%	2.64E-03	1%	9.22E-02	43%	0	7.99E-05	<1%	0	<1%	3.51E-04	<1%	-4.69E-02	
Eutrophication	1.81E-02	Kg PO ₄ ³⁻ -eq	9.33E-03	51%	3.47E-04	2%	3.02E-04	2%	7.37E-03	41%	0	1.05E-05	<1%	0	<1%	1.11E-04	<1%	-2.53E-03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 547 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.91E+01	MJ	2.65E+01	91%	1.87E-01	<1%	5.57E-01	2%	1.88E+00	6%	0	5.65E-03	<1%	0	<1%	1.59E-02	<1%	5.91E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of renewable primary energy	2.91E+01	MJ	2.65E+01	91%	1.87E-01	<1%	5.57E-01	2%	1.72E+00	6%	0	5.65E-03	<1%	0	<1%	1.59E-02	<1%	5.91E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	9.09E+02	MJ	4.78E+02	53%	1.86E+01	2%	1.03E+01	1%	4.00E+02	43%	0	5.63E-01	<1%	0	<1%	6.74E-01	<1%	-2.77E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	9.09E+02	MJ	4.78E+02	53%	1.86E+01	2%	1.03E+01	1%	4.00E+02	43%	0	5.63E-01	<1%	0	<1%	6.74E-01	<1%	-2.77E+02	
Total use of primary energy	9.38E+02	MJ	5.05E+02	55%	1.88E+01	2%	1.08E+01	1%	4.02E+02	42%	0	5.69E-01	<1%	0	<1%	6.90E-01	<1%	-2.18E+02	
Use of secondary materials	8.00E-01	Kg	4.00E-01	50%	0	0%	0	0%	4.00E-01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	1.21E-01	m³	6.28E-02	52%	3.29E-03	3%	2.18E-03	2%	4.92E-02	41%	0	9.94E-05	<1%	0	2%	2.61E-04	<1%	-1.58E-02	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 547 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	1.26E-04	Kg	9.68E-05	76%	1.12E-05	9%	4.56E-06	4%	1.14E-05	9%	0	3.38E-07	<1%	0	<1%	1.26E-06	<1%	1.56E-04	
Non-hazardous waste disposed	6.58E+00	Kg	1.25E+00	19%	8.40E-01	19%	2.39E-01	6%	2.57E+00	39%	0	2.54E-02	<1%	0	<1%	1.65E+00	38%	2.77E-01	
Radioactive waste disposed	4.86E-04	Kg	2.42E-04	51%	1.19E-04	31%	2.06E-05	5%	9.87E-05	20%	0	3.58E-06	<1%	0	<1%	1.58E-06	<1%	9.12E-04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	6.86E-01	Kg	0	0%	0	0%	3.43E-01	50%	3.43E-01	50%	0	0	0%	0	85%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 684 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 684 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	2.19E-05	Kg Sb-eq	1,57E-05	72%	1,85E-06	8%	1,88E-06	9%	2,40E-06	11%	0	5,75E-08	<1%	0	<1%	2,51E-08	<1%	-7,99E-07	
Abiotic Resources Dep potential (fossil fuels)	3.70E+02	MJ	1,97E+02	54%	8,98E+00	2%	5,52E+00	2%	1,58E+02	42%	0	2,79E+01	<1%	0	<1%	2,88E+01	<1%	-1,36E+02	
Global warming	3.32E+01	Kg CO ₂ -eq	1,65E+01	51%	5,97E+01	2%	6,04E+01	2%	1,47E+01	42%	0	1,85E+02	<1%	0	3%	8,40E+01	<1%	-1,19E+01	
Ozone Depletion potential	7.86E-07	Kg CFC 11-eq	5,55E-07	78%	1,11E-07	15%	3,61E-08	5%	7,41E-08	<1%	0	3,44E-09	<1%	0	<1%	3,47E-09	<1%	2,16E-07	
Photochemical ozone formation, POCP	5.50E-03	Kg C ₂ H ₄ -eq	2,97E-03	54%	9,01E-05	2%	8,77E-05	2%	2,35E-03	42%	0	2,80E-06	<1%	0	<1%	4,01E-06	<1%	-1,75E-03	
Acidification potential	1.02E+01	Kg SO ₂ -eq	5,53E+02	55%	1,40E+03	1%	1,73E+03	2%	4,26E+02	41%	0	4,35E+05	<1%	0	<1%	1,64E+04	<1%	-2,47E+02	
Eutrophication	8.69E-03	Kg PO ₄ ³⁻ -eq	4,52E+03	55%	1,84E+04	2%	2,13E+04	3%	3,44E+03	39%	0	5,70E+06	<1%	0	<1%	5,15E+05	<1%	-1,32E+03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 684 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	1.60E+01	MJ	1,47E+01	92%	9.89E+02	<1%	3.76E+01	2%	8.14E+01	5%	0	3.07E+03	<1%	0	<1%	7.47E+03	<1%	2.57E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use a renewable primary energy	1.60E+01	MJ	1,47E+01	92%	9.89E+02	<1%	3.76E+01	2%	8.14E+01	5%	0	3.07E+03	<1%	0	<1%	7.47E+03	<1%	2.57E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	4.36E+02	MJ	2.35E+02	54%	9.86E+00	2%	6.34E+00	2%	1.84E+02	42%	0	3.07E+01	<1%	0	<1%	3.20E+01	<1%	-1.36E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	4.36E+02	MJ	2.35E+02	54%	9.86E+00	2%	6.34E+00	2%	1.84E+02	42%	0	3.07E+01	<1%	0	<1%	3.20E+01	<1%	-1.36E+02	
Total use of primary energy	4.52E+02	MJ	2.50E+02	56%	9.96E+00	2%	6.71E+00	2%	1.85E+02	40%	0	3.10E+01	<1%	0	<1%	3.27E+01	<1%	-1.10E+02	
Use of secondary materials	3.70E+01	Kg	1.85E+01	50%	0	0%	0	0%	1.85E+01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	5.44E+02	m³	2.71E+02	50%	1.74E+03	3%	1.22E+03	2%	2.28E+02	42%	0	5.41E+05	<1%	0	3%	1.30E+04	<1%	-5.11E+03	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 684 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	5.81E+05	Kg	4.56E+05	79%	5.92E+06	9%	3.52E+06	6%	2.26E+06	4%	0	1.84E+07	<1%	0	<1%	1.84E+07	<1%	7.18E+05	
Non-hazardous waste disposed	2.94E+00	Kg	6.04E+01	22%	4.44E+01	20%	1.64E+01	8%	8.93E+01	30%	0	1.38E+02	<1%	0	<1%	8.21E+01	37%	1.18E+01	
Radioactive waste disposed	2.38E-04	Kg	1.15E-04	48%	6.27E+05	32%	1.71E+05	9%	3.93E+05	16%	0	1.96E+06	1%	0	<1%	1.26E+06	<1%	4.22E-04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	3.02E+01	Kg	0	0%	0	0%	1.51E+01	50%	1.51E+01	50%	0	0	0%	0	89%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 5513 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 5513 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	5.05E-05	Kg Sb-eq	3.45E-05	73%	4.19E-06	9%	2.22E-06	5%	6.11E-06	13%	0	1.28E-07	<1%	0	<1%	9.04E-09	<1%	-2.00E-06
Abiotic Resources Dep potential (fossil fuels)	9.32E+02	MJ	4.84E+02	53%	2.04E+01	2%	1.01E+01	1%	3.99E+02	44%	0	6.21E-01	<1%	0	<1%	2.73E-01	<1%	-3.36E+02
Global warming	8.43E+01	Kg CO ₂ -eq	4.08E+01	50%	1.35E+00	2%	1.22E+00	2%	3.54E+01	44%	0	4.12E-02	<1%	0	3%	8.42E-03	<1%	-2.93E+01
Ozone Depletion potential	1.63E-06	Kg CFC 11-eq	1.09E-06	77%	2.51E-07	18%	4.80E-08	3%	1.34E-08	<1%	0	7.65E-09	<1%	0	<1%	3.34E-09	<1%	7.70E-07
Photochemical ozone formation, POCP	1.38E-02	Kg C ₂ H ₄ -eq	7.23E-03	53%	2.04E-04	1%	1.55E-04	1%	6.21E-03	44%	0	6.23E-06	<1%	0	<1%	1.03E-05	<1%	-4.17E-03
Acidification potential	2.55E-01	Kg SO ₂ -eq	1.35E-01	54%	3.17E-03	1%	3.00E-03	1%	1.12E-01	44%	0	9.66E-05	<1%	0	<1%	4.25E-04	<1%	-5.69E-02
Eutrophication	2.18E-02	Kg PO ₄ ³⁻ -eq	1.12E-02	55%	4.16E-04	2%	3.32E-04	2%	8.94E-03	41%	0	1.27E-05	<1%	0	<1%	1.34E-04	<1%	-3.07E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 5513 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	3.55E+01	MJ	3,25E+01	91%	2.24E-01	<1%	6.46E-01	2%	2.28E+00	6%	0	6.83E-03	<1%	0	<1%	1.93E-02	<1%	7,17E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use a renewable primary energy	3.55E+01	MJ	3,25E+01	91%	2.24E-01	<1%	6.46E-01	2%	2.28E+00	6%	0	6.83E-03	<1%	0	<1%	1.93E-02	<1%	7,17E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	1.09E+03	MJ	4,84E+02	53%	2,04E+01	2%	1,01E+01	1%	4,86E+02	44%	0	6,21E-01	<1%	0	<1%	8,15E-01	<1%	-3,36E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	1.09E+03	MJ	4,84E+02	53%	2,04E+01	2%	1,01E+01	1%	4,86E+02	44%	0	6,21E-01	<1%	0	<1%	8,15E-01	<1%	-3,36E+02
Total use of primary energy	1.13E+03	MJ	6,05E+02	54%	2,26E+01	2%	1,24E+01	1%	4,88E+02	42%	0	6,88E-01	<1%	0	<1%	8,35E-01	<1%	-2,64E+02
Use of secondary materials	9.70E-01	Kg	4,85E-01	50%	0	0%	0	0%	4,85E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	1.46E-01	m³	7,56E-02	52%	3,94E-03	3%	2,39E-03	2%	5,97E-02	41%	0	1,20E-04	<1%	0	2%	3,15E-04	<1%	-1,92E-02

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 5513 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Hazardous waste disposed	1.51E-04	Kg	1,26E-04	83%	1,23E-05	8%	4,94E-06	3%	1,39E-05	10%	0	4,09E-07	<1%	0	1%	1,53E-06	<1%	1,90E-04
Non-hazardous waste disposed	7.90E+00	Kg	1,50E+00	19%	1,01E+00	19%	2,52E-01	5%	3,11E+00	21%	0	3,07E-02	<1%	0	<1%	1,99E+00	38%	3,36E+01
Radioactive waste disposed	5.78E-04	Kg	2,87E-04	50%	1,43E-04	31%	2,16E-05	5%	1,20E-04	21%	0	4,34E-06	1%	0	<1%	3,16E-06	<1%	1,11E+03
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Materials for recycling	6.98E-01	Kg	0	0%	0	0%	3,49E-01	50%	3,49E-01	50%	0	0	0%	0	87%	0	0%	0
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 6104 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6104 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life							Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	2.95E-05	Kg Sb-eq	1.85E-05	72%	2.26E-06	9%	1.93E-06	7%	4.59E-06	11%	0	6.89E-08	<1%	0	<1%	2.26E-06	<1%	-9.97E-07
Abiotic Resources Dep potential (fossil fuels)	4.73E+02	MJ	2.42E+02	53%	1.10E+01	2%	6.25E+00	1%	2.02E+02	43%	0	3.35E-01	<1%	0	<1%	1.13E+01	<1%	-1.69E+02
Global warming	4.13E+01	Kg CO ₂ -eq	2.04E+01	51%	7.29E-01	2%	6.70E-01	2%	1.88E+01	43%	0	2.22E-02	<1%	0	3%	7.41E-01	<1%	-1.47E+01
Ozone Depletion potential	1.05E-06	Kg CFC 11-eq	6.27E-07	77%	1.35E-07	17%	3.78E-08	5%	1.08E-07	1%	0	4.13E-09	<1%	0	<1%	1.38E-07	<1%	3.12E-07
Photochemical ozone formation, POCP	6.99E-03	Kg C ₂ H ₄ -eq	3.66E-03	54%	1.10E-04	2%	9.86E-05	1%	2.92E-03	43%	0	3.36E-06	<1%	0	<1%	1.13E-04	<1%	-2.15E-03
Acidification potential	1.29E-01	Kg SO ₂ -eq	6.80E-02	55%	1.71E-03	1%	1.93E-03	2%	5.27E-02	42%	0	5.21E-05	<1%	0	<1%	1.79E-03	<1%	-2.99E-02
Eutrophication	1.10E-02	Kg PO ₄ ³⁻ -eq	5.61E-03	55%	2.24E-04	2%	2.31E-04	2%	4.09E-03	40%	0	6.84E-06	<1%	0	<1%	2.39E-04	<1%	-1.61E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6104 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.11E+01	MJ	1.93E+01	92%	1.21E-01	<1%	4.46E-01	2%	1.11E+00	5%	0	3.68E-03	<1%	0	<1%	1.23E-01	<1%	3.34E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use a renewable primary energy	2.11E+01	MJ	1.93E+01	92%	1.21E-01	<1%	4.46E-01	2%	1.11E+00	5%	0	3.68E-03	<1%	0	<1%	1.23E-01	<1%	3.34E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	5.55E+02	MJ	2.88E+02	53%	1.21E+01	2%	7.19E+00	1%	2.35E+02	43%	0	3.68E-01	<1%	0	<1%	1.22E+01	<1%	-1,69E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	5.55E+02	MJ	2.88E+02	53%	1.21E+01	2%	7.19E+00	1%	2.35E+02	43%	0	3.68E-01	<1%	0	<1%	1.22E+01	<1%	-1,69E+02	
Total use of primary energy	5.76E+02	MJ	3.07E+02	55%	1.22E+01	2%	7.64E+00	1%	2.36E+02	41%	0	3.71E-01	<1%	0	<1%	1.23E+01	<1%	-1,36E+02	
Use of secondary materials	4.70E-01	Kg	2.35E-01	50%	0	0%	0	0%	2.35E-01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	6.95E-02	m³	3.51E-02	51%	2.13E-03	3%	1.36E-03	2%	2.89E-02	42%	0	6.48E-05	<1%	0	3%	1.61E-04	<1%	-7,57E-03	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6104 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	8.30E-05	Kg	5.78E-05	70%	7.23E-06	8%	3.73E-06	5%	6.71E-06	1%	0	2.20E-07	<1%	0	<1%	7.28E-06	<1%	9,15E-05	
Non-hazardous waste disposed	4.54E+00	Kg	7.52E-01	16.5%	5.43E-01	20%	1.72E-01	6%	1.51E+00	33%	0	1.66E-02	<1%	0	<1%	1.55E+00	37%	1,55E-01	
Radioactive waste disposed	3.76E-04	Kg	1.44E-04	38%	7.67E-05	32%	1.80E-05	7%	5.80E-05	16%	0	2.34E-06	1%	0	<1%	7.77E-05	<1%	5,36E-04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	3.06E-01	Kg	0	0%	0	0%	1.53E-01	50%	1,53E-01	50%	0	0	0%	0	90%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 6124 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6124 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	2.93E-05	Kg Sb-eq	2.01E-05	68%	2.37E-06	9%	1.96E-06	7%	4.89E-06	17%	0	7.32E-08	<1%	0	<1%	3.38E-08	<1%	-1.06E-06	
Abiotic Resources Dep potential (fossil fuels)	4.90E+02	MJ	2.57E+02	53%	1.15E+01	2%	6.47E+00	1%	2.14E+02	43%	0	3.55E-01	<1%	0	<1%	3.85E-01	<1%	-1.79E+02	
Global warming	4.42E+01	Kg CO ₂ -eq	2.17E+01	51%	7.66E-01	2%	6.90E-01	2%	2.00E+01	43%	0	2.36E-02	<1%	0	3%	1.13E+00	<1%	-1.57E+01	
Ozone Depletion potential	9.84E-07	Kg CFC 11-eq	6.77E-07	77%	1.42E-07	16%	3.87E-08	4%	1.15E-07	<1%	0	4.38E-09	<1%	0	<1%	4.64E-09	<1%	3.32E-07	
Photochemical ozone formation, POCP	7.31E-03	Kg C ₂ H ₄ -eq	3.89E-03	54%	1.16E-04	2%	1.02E-04	1%	3.20E-03	43%	0	3.56E-06	<1%	0	<1%	5.38E-06	<1%	-2.28E-03	
Acidification potential	1.35E-01	Kg SO ₂ -eq	7.22E-02	55%	1.80E-03	1%	1.99E-03	2%	5.76E-02	42%	0	5.53E-05	<1%	0	<1%	2.21E-04	<1%	-3.18E-02	
Eutrophication	1.15E-02	Kg PO ₄ ³⁻ -eq	5.95E-03	55%	2.36E-04	2%	2.36E-04	2%	4.61E-03	40%	0	7.26E-06	<1%	0	<1%	6.94E-05	<1%	-1.71E-03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6124 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life							Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.15E+01	MJ	1.97E+01	92%	1.27E-01	<1%	4.53E-01	2%	1.18E+00	5%	0	3.91E-03	<1%	0	<1%	1.00E-02	<1%	3.56E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of renewable primary energy	2.15E+01	MJ	1.97E+01	92%	1.27E-01	<1%	4.53E-01	2%	1.18E+00	5%	0	3.91E-03	<1%	0	<1%	1.00E-02	<1%	3.56E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	5.76E+02	MJ	3.05E+02	53%	1.27E+01	2%	7.45E+00	1%	2.50E+02	43%	0	3.90E-01	<1%	0	<1%	4.28E-01	<1%	-1.79E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	5.76E+02	MJ	3.05E+02	53%	1.27E+01	2%	7.45E+00	1%	2.50E+02	43%	0	3.90E-01	<1%	0	<1%	4.28E-01	<1%	-1.79E+02
Total use of primary energy	5.98E+02	MJ	3.25E+02	55%	1.28E+01	2%	7.91E+00	1%	2.51E+02	41%	0	3.94E-01	<1%	0	<1%	4.38E-01	<1%	-1.43E+02
Use of secondary materials	5.00E-01	Kg	2.50E-01	50%	0	0%	0	0%	2.50E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	7.38E-02	m³	3.73E-02	51%	2.23E-03	3%	1.39E-03	2%	3.08E-02	42%	0	6.88E-05	<1%	0	3%	1.71E-04	<1%	-8.06E-03

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6124 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	8.03E-05	Kg	6.08E-05	76%	7.60E-06	9%	3.79E-06	5%	7.14E-06	9%	0	2.34E-07	<1%	0	1%	7.90E-07	<1%	9.74E-05	
Non-hazardous waste disposed	4.24E+00	Kg	7.95E-01	28%	5.71E-01	20%	1.74E-01	6%	1.60E+00	38%	0	1.76E-02	<1%	0	<1%	1.08E+00	37%	1.65E-01	
Radioactive waste disposed	3.16E-04	Kg	1.51E-04	48%	8.06E-05	32%	1.81E-05	7%	6.17E-05	20%	0	2.48E-06	1%	0	<1%	1.68E-06	<1%	5.70E-04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	3.10E-01	Kg	0	0%	0	0%	1.55E-01	50%	1.55E-01	50%	0	0	0%	0	90%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 6166 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6166 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	3.34E-05	Kg Sb-eq	2.27E-05	68%	2.86E-06	9%	2.01E-06	6%	5.87E-06	18%	0	8.75E-08	<1%	0	<1%	4.05E-08	<1%	-1.27E-06
Abiotic Resources Dep potential (fossil fuels)	5.96E+02	MJ	3.16E+02	53%	1.39E+01	2%	7.45E+00	1%	2.57E+02	42%	0	4.25E-01	<1%	0	<1%	4.61E-01	<1%	-2.15E+02
Global warming	5.34E+01	Kg CO ₂ -eq	2.63E+01	51%	9.23E-01	2%	9.16E-01	2%	2.40E+01	43%	0	2.82E-02	<1%	0	3%	1.36E+00	<1%	-1.88E+01
Ozone Depletion potential	1.15E-06	Kg CFC 11-eq	7.85E-07	77%	1.71E-07	17%	4.14E-08	4%	1.38E-07	<1%	0	5.24E-09	<1%	0	<1%	5.54E-09	<1%	3.99E-07
Photochemical ozone formation, POCP	8.80E-03	Kg C ₂ H ₄ -eq	4.71E-03	54%	1.39E-04	2%	1.16E-04	1%	3.84E-03	43%	0	4.26E-06	<1%	0	<1%	6.45E-06	<1%	-2.74E-03
Acidification potential	1.63E-01	Kg SO ₂ -eq	8.77E-02	55%	2.16E-03	1%	2.26E-03	1%	6.91E-02	42%	0	6.61E-05	<1%	0	<1%	2.64E-04	<1%	-3.81E-02
Eutrophication	1.38E-02	Kg PO ₄ ³⁻ -eq	7.21E-03	55%	2.84E-04	2%	2.65E-04	2%	5.53E-03	40%	0	8.68E-06	<1%	0	<1%	8.32E-05	<1%	-2.05E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6166 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life							Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.39E+01	MJ	2.19E+01	92%	1.53E-01	<1%	4.86E-01	2%	1.41E+00	5%	0	4.68E-03	<1%	0	<1%	1.20E-02	<1%	4.27E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of renewable primary energy	2.39E+01	MJ	2.19E+01	92%	1.53E-01	<1%	4.86E-01	2%	1.41E+00	5%	0	4.68E-03	<1%	0	<1%	1.20E-02	<1%	4.27E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	7.01E+02	MJ	3.76E+02	54%	1.53E+01	2%	8.62E+00	1%	3.00E+02	42%	0	4.66E-01	<1%	0	<1%	5.12E-01	<1%	-2.15E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	7.01E+02	MJ	3.76E+02	54%	1.53E+01	2%	8.62E+00	1%	3.00E+02	42%	0	4.66E-01	<1%	0	<1%	5.12E-01	<1%	-2.15E+02
Total use of primary energy	7.25E+02	MJ	3.98E+02	55%	1.54E+01	2%	9.10E+00	1%	3.02E+02	41%	0	4.71E-01	<1%	0	<1%	5.24E-01	<1%	-1.72E+02
Use of secondary materials	6.00E-01	Kg	3.00E-01	50%	0	0%	0	0%	3.00E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	8.90E-02	m³	4.51E-02	51%	2.69E-03	3%	1.78E-03	2%	3.69E-02	41%	0	8.23E-05	<1%	0	3%	2.03E-04	<1%	-9.67E-03

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 6166 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Hazardous waste disposed	9.64E-05	Kg	7.33E-05	77%	9.15E-06	9%	4.11E-06	4%	8.57E-06	12%	0	2.80E-07	<1%	0	<1%	9.48E-07	<1%	1.17E-04
Non-hazardous waste disposed	5.10E+00	Kg	9.68E-01	19%	6.87E-01	20%	2.13E-01	6%	1.93E+00	38%	0	2.10E-02	<1%	0	<1%	1.28E+00	37%	1.98E-01
Radioactive waste disposed	3.82E-04	Kg	1.86E-04	49%	9.71E-05	32%	1.92E-05	6%	7.41E-05	19%	0	2.97E-06	1%	0	<1%	2.00E-06	<1%	6.84E-04
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Materials for recycling	5.74E-01	Kg	0	0%	0	0%	2.87E-01	50%	2.87E-01	50%	0	0	0%	0	85%	0	0%	0
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 9207 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9207 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life							Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	3.61E-05	Kg Sb-eq	2.63E-05	73%	3.28E-06	9%	2.07E-06	6%	4.45E-06	12%	0	1.02E-07	<1%	0	<1%	4.72E-08	<1%	-1.49E-06
Abiotic Resources Dep potential (fossil fuels)	6.80E+02	MJ	3.57E+02	53%	1.59E+01	2%	8.08E+00	1%	2.98E+02	43%	0	4.94E-01	<1%	0	<1%	5.36E-01	<1%	-2.51E+02
Global warming	6.16E+01	Kg CO ₂ -eq	3.02E+01	51%	1.06E+00	2%	8.81E-01	1%	2.78E+01	43%	0	3.28E-02	<1%	0	3%	1.59E+00	<1%	-2.19E+01
Ozone Depletion potential	1.31E-06	Kg CFC 11-eq	9.12E-07	78%	1.96E-07	17%	4.35E-08	4%	1.40E-07	<1%	0	6.09E-09	<1%	0	<1%	6.45E-09	<1%	4.65E-07
Photochemical ozone formation, POCP	1.01E-02	Kg C ₂ H ₄ -eq	5.41E-03	54%	1.60E-04	2%	1.26E-04	1%	4.44E-03	43%	0	4.96E-06	<1%	0	<1%	7.51E-06	<1%	-3.19E-03
Acidification potential	1.88E-01	Kg SO ₂ -eq	1.01E-01	55%	2.48E-03	1%	2.44E-03	1%	8.05E-02	43%	0	7.69E-05	<1%	0	<1%	3.08E-04	<1%	-4.45E-02
Eutrophication	1.60E-02	Kg PO ₄ ³⁻ -eq	8.29E-03	55%	3.25E-04	2%	2.76E-04	2%	6.50E-03	40%	0	1.01E-05	<1%	0	<1%	9.70E-05	<1%	-2.39E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9207 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.91E+01	MJ	2.68E+01	92%	1.75E-01	<1%	5.60E-01	2%	1.54E+00	5%	0	5.44E-03	<1%	0	<1%	1.40E-02	<1%	4.98E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use a renewable primary energy	2.91E+01	MJ	2.68E+01	92%	1.75E-01	<1%	5.60E-01	2%	1.54E+00	5%	0	5.44E-03	<1%	0	<1%	1.40E-02	<1%	4.98E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	8.00E+02	MJ	4.24E+02	53%	1.75E+01	2%	9.36E+00	1%	3.48E+02	43%	0	5.43E-01	<1%	0	<1%	5.96E-01	<1%	-2.51E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	6.69E+02	MJ	3.57E+02	53%	1.59E+01	2%	8.08E+00	1%	2.88E+02	43%	0	4.94E-01	<1%	0	<1%	2.04E-01	<1%	-2.51E+02	
Total use of primary energy	8.29E+02	MJ	4.51E+02	55%	1.77E+01	2%	9.92E+00	1%	3.49E+02	41%	0	5.48E-01	<1%	0	<1%	6.10E-01	<1%	-2.01E+02	
Use of secondary materials	7.00E-01	Kg	3.50E-01	50%	0	0%	0	0%	3.50E-01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	1.03E-01	m³	5.17E-02	50%	3.08E-03	3%	1.72E-03	2%	4.31E-02	42%	0	9.57E-05	<1%	0	3%	2.35E-04	<1%	-1.13E-02	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9207 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	1.05E-04	Kg	8.45E-05	80%	1.05E-05	9%	4.24E-06	4%	3.84E-06	2%	0	3.26E-07	<1%	0	<1%	1.10E-06	<1%	1,37E-04	
Non-hazardous waste disposed	5.27E+00	Kg	1.10E+00	20%	7.88E-01	20%	1.99E-01	5%	1.67E+00	32%	0	2.45E-02	<1%	0	<1%	1.49E+00	38%	2,31E-01	
Radioactive waste disposed	4.19E-04	Kg	2.08E-04	49%	1.11E-04	33%	1.97E-05	6%	7.43E-05	17%	0	3.45E-06	1%	0	<1%	2.33E-06	<1%	7,98E-04	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	4,10E-01	Kg	0	0%	0	0%	2,05E-01	50%	2,05E-01	50%	0	0	0%	0	90%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 9257 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9257 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life							Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	3.82E-05	Kg Sb-eq	2.80E-05	73%	3.43E-06	9%	2.10E-06	5%	4.71E-06	12%	0	1.07E-07	<1%	0	<1%	4.99E-08	<1%	-1.57E-06
Abiotic Resources Dep potential (fossil fuels)	7.17E+02	MJ	3.76E+02	53%	1.67E+01	2%	8.38E+00	1%	3.15E+02	43%	0	5.22E-01	<1%	0	<1%	5.66E-01	<1%	-2.65E+02
Global warming	6.50E+01	Kg CO ₂ -eq	3.19E+01	51%	1.11E+00	2%	9.09E-01	1%	2.94E+01	43%	0	3.47E-02	<1%	0	3%	1.68E+00	<1%	-2.32E+01
Ozone Depletion potential	1.38E-06	Kg CFC 11-eq	9.70E-07	78%	2.05E-07	17%	4.46E-08	4%	1.47E-07	<1%	0	6.43E-09	<1%	0	<1%	6.82E-09	<1%	4.92E-07
Photochemical ozone formation, POCP	1.07E-02	Kg C ₂ H ₄ -eq	5.71E-03	54%	1.67E-04	2%	1.31E-04	1%	4.70E-03	43%	0	5.24E-06	<1%	0	<1%	7.94E-06	<1%	-3.37E-03
Acidification potential	1.99E-01	Kg SO ₂ -eq	1.06E-01	55%	2.60E-03	1%	2.53E-03	1%	8.52E-02	43%	0	8.13E-05	<1%	0	<1%	3.26E-04	<1%	-4.70E-02
Eutrophication	1.69E-02	Kg PO ₄ ³⁻ -eq	8.74E-03	55%	3.41E-04	2%	2.83E-04	2%	6.87E-03	40%	0	1.07E-05	<1%	0	<1%	1.03E-04	<1%	-2.53E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9257 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	2.98E+01	MJ	2.98E+01	92%	1.84E-01	<1%	5.69E-01	2%	1.63E+00	5%	0	5.75E-03	<1%	0	<1%	1.48E-02	<1%	5.26E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of renewable primary energy	2.98E+01	MJ	2.98E+01	92%	1.84E-01	<1%	5.69E-01	2%	1.63E+00	5%	0	5.75E-03	<1%	0	<1%	1.48E-02	<1%	5.26E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	8.44E+02	MJ	4.47E+02	53%	1.83E+01	2%	9.71E+00	1%	3.68E+02	43%	0	5.73E-01	<1%	0	<1%	6.29E-01	<1%	-2.65E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	8.44E+02	MJ	4.47E+02	53%	1.83E+01	2%	9.71E+00	1%	3.68E+02	43%	0	5.73E-01	<1%	0	<1%	6.29E-01	<1%	-2.65E+02
Total use of primary energy	8.74E+02	MJ	4.74E+02	55%	1.85E+01	2%	1.03E+01	1%	3.69E+02	42%	0	5.79E-01	<1%	0	<1%	6.44E-01	<1%	-2.12E+02
Use of secondary materials	7.40E-01	Kg	3.70E-01	50%	0	0%	0	0%	3.70E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	1.08E-01	m³	5.46E-02	50%	3.23E-03	3%	1.77E-03	2%	4.55E-02	42%	0	1.01E-04	<1%	0	3%	2.48E-04	<1%	-1.19E-02

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9257 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Hazardous waste disposed	1.10E-04	Kg	8.89E-05	85%	1.10E-05	9%	4.32E-06	4%	4.27E-06	3,6%	0	3.44E-07	<1%	0	<1%	1.17E-06	<1%	1,45E-04
Non-hazardous waste disposed	5.55E+00	Kg	1.16E+00	20%	8.25E-01	20%	2.02E-01	5%	1.76E+00	32%	0	2.58E-02	<1%	0	<1%	1.57E+00	38%	2,44E-01
Radioactive waste disposed	4.39E-04	Kg	2.18E-04	50%	1.16E-04	33%	1.99E-05	6%	7.86E-05	18%	0	3.65E-06	1%	0	<1%	2.46E-06	<1%	8,44E-04
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Materials for recycling	4,16E-01	Kg	0	0%	0	0%	2,08E-01	50%	2,08E-01	50%	0	0	0%	0	91%	0	0%	0
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOPLUS® 9327 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9327 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Abiotic Resources Dep potential (elements)	3.95E-05	Kg Sb-eq	2.87E-05	72%	3.66E-06	9%	2.11E-06	5%	5.09E-06	13%	0	1.16E-07	<1%	0	<1%	5.39E-08	<1%	-1.70E-06
Abiotic Resources Dep potential (fossil fuels)	7.73E+02	MJ	4.04E+02	53%	1.78E+01	2%	8.82E+00	1%	3.40E+02	43%	0	5.64E-01	<1%	0	<1%	6.11E-01	<1%	-2.87E+02
Global warming	7.01E+01	Kg CO ₂ -eq	3.44E+01	51%	1.18E+00	2%	9.51E-01	1%	3.18E+01	43%	0	3.74E-02	<1%	0	3%	1.82E+00	<1%	-2.51E+01
Ozone Depletion potential	1.45E-06	Kg CFC 11-eq	1.01E-06	78%	2.19E-07	17%	4.54E-08	3%	1.59E-07	<1%	0	6.95E-09	<1%	0	<1%	7.36E-09	<1%	5.32E-07
Photochemical ozone formation, POCP	1.15E-02	Kg C ₂ H ₄ -eq	6.14E-03	54%	1.78E-04	2%	1.37E-04	1%	5.08E-03	43%	0	5.65E-06	<1%	0	<1%	8.57E-06	<1%	-3.65E-03
Acidification potential	2.14E-01	Kg SO ₂ -eq	1.14E-01	54%	2.77E-03	1%	2.65E-03	1%	9.21E-02	43%	0	8.77E-05	<1%	0	<1%	3.52E-04	<1%	-5.08E-02
Eutrophication	1.82E-02	Kg PO ₄ ³⁻ -eq	9.41E-03	55%	3.63E-04	2%	2.94E-04	2%	7.43E-03	41%	0	1.15E-05	<1%	0	<1%	1.11E-04	<1%	-2.73E-03

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9327 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	3.09E+01	MJ	2.83E+01	92%	1.96E-01	<1%	5.83E-01	2%	1.77E+00	6%	0	6.20E-03	<1%	0	<1%	1.60E-02	<1%	5.69E+01
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of renewable primary energy	3.09E+01	MJ	2.83E+01	92%	1.96E-01	<1%	5.83E-01	2%	1.77E+00	6%	0	6.20E-03	<1%	0	<1%	1.60E-02	<1%	5.69E+01
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	9.09E+02	MJ	4.81E+02	53%	1.95E+01	2%	1.02E+01	1%	3.97E+02	43%	0	6.19E-01	<1%	0	<1%	6.80E-01	<1%	-2.87E+02
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Total use of non-renewable primary energy	9.09E+02	MJ	4.81E+02	53%	1.95E+01	2%	1.02E+01	1%	3.97E+02	43%	0	6.19E-01	<1%	0	<1%	6.80E-01	<1%	-2.87E+02
Total use of primary energy	9.40E+02	MJ	5.09E+02	55%	1.97E+01	2%	1.08E+01	1%	3.99E+02	42%	0	6.25E-01	<1%	0	<1%	6.96E-01	<1%	-2.30E+02
Use of secondary materials	8.00E-01	Kg	4.00E-01	50%	0	0%	0	0%	4.00E-01	50%	0	0	0%	0	0%	0	0%	0
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Net use of fresh water	1.16E-01	m³	5.86E-02	50%	3.44E-03	3%	1.84E-03	2%	4.92E-02	42%	0	1.09E-04	<1%	0	3%	2.67E-04	<1%	-1.29E-02

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOPLUS® 9327 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life						Module D	
			A1-A3		A4		A5		B4		C1	C2		C3		C4		
Hazardous waste disposed	1.17E-04	Kg	9.51E-05	82%	1.17E-05	9%	4.42E-06	4%	4.62E-06	4%	0	3.71E-07	<1%	0	1%	1.26E-06	<1%	1,56E-04
Non-hazardous waste disposed	5.96E+00	Kg	1.25E+00	21%	8.80E-01	20%	2.06E-01	5%	1.91E+00	32%	0	2.79E-02	<1%	0	<1%	1.69E+00	38%	2,64E-01
Radioactive waste disposed	4.69E-04	Kg	2.33E-04	50%	1.24E-04	33%	2.03E-05	5%	8.49E-05	19%	0	3.94E-06	1%	0	<1%	2.65E-06	<1%	9,12E-04
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Materials for recycling	4.22E-01	Kg	0	0%	0	0%	2.11E-01	50%	2.11E-01	50%	0	0	0%	0	92%	0	0%	0
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

ARCOWALL® 5613 Environmental performance of 1 m²

Environmental impacts corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOWALL® 5613 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Abiotic Resources Dep potential (elements)	5.28E-05	Kg Sb-eq	3.86E-05	73%	4.75E-06	9%	2.30E-06	4%	6.99E-06	13%	0	1.45E-07	<1%	0	<1%	1.37E-07	<1%	-2.27E-06	
Abiotic Resources Dep potential (fossil fuels)	1.05E+03	MJ	5.45E+02	53%	2.31E+01	2%	1.11E+01	1%	4.68E+02	44%	0	7.03E-01	<1%	0	<1%	1.35E+00	<1%	-3.81E+02	
Global warming	9.76E+01	Kg CO ₂ -eq	4.62E+01	50%	1.53E+00	2%	1.31E+00	1%	4.37E+01	44%	0	4.67E-02	<1%	0	3%	4.98E+00	<1%	-3.32E+01	
Ozone Depletion potential	1.81E-06	Kg CFC 11-eq	1.22E-06	77%	2.84E-07	18%	5.08E-08	3%	2.19E-07	<1%	0	8.66E-09	<1%	0	<1%	1.62E-08	<1%	8.74E-07	
Photochemical ozone formation, POCP	1.56E-02	Kg C ₂ H ₄ -eq	8.17E-03	53%	2.32E-04	2%	1.70E-04	1%	6.99E-06	44%	0	7.05E-06	<1%	0	<1%	2.08E-05	<1%	-4.72E-03	
Acidification potential	2.89E-01	Kg SO ₂ -eq	1.52E-01	54%	3.59E-03	1%	3.27E-03	1%	1.27E-01	44%	0	1.09E-04	<1%	0	<1%	8.93E-04	<1%	-6.45E-02	
Eutrophication	2.49E-02	Kg PO ₄ ³⁻ -eq	1.27E-02	55%	4.72E-04	2%	3.56E-04	2%	1.02E-02	41%	0	1.44E-05	<1%	0	<1%	2.90E-04	<1%	-3.48E-03	

Resources use corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOWALL® 5613 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Use of renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	4.12E+01	MJ	3.77E+01	92%	2.54E-01	<1%	7.27E-01	2%	2.43E+00	6%	0	7.74E-03	<1%	0	<1%	3.96E-02	<1%	8.13E+01	
Use of renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use a renewable primary energy	4.12E+01	MJ	3.77E+01	92%	2.54E-01	<1%	7.27E-01	2%	2.43E+00	6%	0	7.74E-03	<1%	0	<1%	3.96E-02	<1%	8.13E+01	
Use of non-renewable primary energy, excluding the resources of non-renewable primary energy used as a raw material	1.23E+03	MJ	6.44E+02	53%	2.53E+01	2%	1.29E+01	1%	5.47E+02	44%	0	7.72E-01	<1%	0	<1%	1.51E+00	<1%	-3.81E+02	
Use of non-renewable primary energy used as raw material	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Total use of non-renewable primary energy	1.23E+03	MJ	6.44E+02	53%	2.53E+01	2%	1.29E+01	1%	5.47E+02	44%	0	7.72E-01	<1%	0	<1%	1.51E+00	<1%	-3.81E+02	
Total use of primary energy	1.27E+03	MJ	6.82E+02	54%	2.56E+01	2%	1.36E+01	1%	5.49E+02	42%	0	7.80E-01	<1%	0	<1%	1.55E+00	<1%	-3.00E+02	
Use of secondary materials	1.10E+00	Kg	5.50E-01	50%	0	0%	0	0%	5.50E-01	50%	0	0	0%	0	0%	0	0%	0	
Use of renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Use of non-renewable secondary fuels	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Net use of fresh water	1.65E-01	m³	8.54E-02	52%	4.47E-03	3%	2.56E-03	2%	6.77E-02	41%	0	1.36E-04	<1%	0	3%	3.56E-04	<1%	-2.18E-02	

Waste production corresponding to the life cycle of the multi-wall celular polycarbonate system ARCOWALL® 5613 relative to 1 m² of surface.

Indicator	TOTAL		Manufacture		Distribution		Installation		Use		End of life								Module D
			A1-A3		A4		A5		B4		C1	C2		C3		C4			
Hazardous waste disposed	1.63E-04	Kg	1.32E-04	81%	1.52E-05	9%	5.18E-06	3%	6.35E-06	4%	0	4.63E-07	<1%	0	1%	3.36E-06	<1%	2.15E-04	
Non-hazardous waste disposed	8.05E+00	Kg	1.69E+00	20%	1.14E+00	20%	2.62E-01	4%	2.62E+00	33%	0	3.48E-02	<1%	0	<1%	2.30E+00	38%	3.81E-01	
Radioactive waste disposed	6.32E-04	Kg	3.22E-04	61%	1.61E-04	32%	2.27E-05	4%	1.17E-04	19%	0	4.91E-06	1%	0	<1%	4.99E-06	<1%	1.25E-03	
Components for its reutilisation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Materials for recycling	7.08E-01	Kg	0	0%	0	0%	3.54E-01	50%	3.54E-01	50%	0	0	0%	0	88%	0	0%	0	
Materials for the energetic evaluation	0	Kg	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	
Exported energy	0	MJ	0	0%	0	0%	0	0%	0	0%	0	0	0%	0	0%	0	0%	0	

A1. Raw materials supply
A2. Transport
A3. Manufacturing Product
A4. Transport
A5. Construction - Installation process

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational Energy use
B7. Operational water use

C1. Decomstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling.
C4. Disposal

MND. Module not declared

3.4. Potential environmental benefits and impacts derived from activities of reuse, recovery and recycling

Table. Indicators of impact evolution. Reuse, recovery and recycling
Data included in the point tables 3.3. (pages 9-20):

ARCOPLUS® 324 Environmental performance of 1 m ²	page	8
ARCOPLUS® 344x Environmental performance of 1 m ²	page	9
ARCOPLUS® 547 Environmental performance of 1 m ²	page	10
ARCOPLUS® 684 Environmental performance of 1 m ²	page	11
ARCOPLUS® 5513 Environmental performance of 1 m ²	page	12
ARCOPLUS® 6104 Environmental performance of 1 m ²	page	13
ARCOPLUS® 6124 Environmental performance of 1 m ²	page	14
ARCOPLUS® 6166 Environmental performance of 1 m ²	page	15
ARCOPLUS® 9207 Environmental performance of 1 m ²	page	16
ARCOPLUS® 9257 Environmental performance of 1 m ²	page	17
ARCOPLUS® 9327 Environmental performance of 1 m ²	page	18
ARCOWALL® 5613 Environmental performance of 1 m ²	page	19

Table. Life cycle inventory data. Reuse, recovery and recycling
Data included in the point tables 3.3. (pages 9-20):

ARCOPLUS® 324 Environmental performance of 1 m ²	page	8
ARCOPLUS® 344x Environmental performance of 1 m ²	page	9
ARCOPLUS® 547 Environmental performance of 1 m ²	page	10
ARCOPLUS® 684 Environmental performance of 1 m ²	page	11
ARCOPLUS® 5513 Environmental performance of 1 m ²	page	12
ARCOPLUS® 6104 Environmental performance of 1 m ²	page	13
ARCOPLUS® 6124 Environmental performance of 1 m ²	page	14
ARCOPLUS® 6166 Environmental performance of 1 m ²	page	15
ARCOPLUS® 9207 Environmental performance of 1 m ²	page	16
ARCOPLUS® 9257 Environmental performance of 1 m ²	page	17
ARCOPLUS® 9327 Environmental performance of 1 m ²	page	18
ARCOWALL® 5613 Environmental performance of 1 m ²	page	19

3.5. Recommendations of this DAP

Comparing construction products of the same category should be done applying the same functional unit and including the whole product life cycle. The Environmental Product Declarations of the same category of product but from different programs may not be comparables because the calculations rules could be different.

Products included in this EPD: ARCOPLUS 324, 344x, 547, 549, 625, 626, 684, 5513, 6104, 6124, 6166, 6410, 9207, 9257 and 9327 and ARCOWALL 5613.

3.6. Cut-off rules

As a cut-off rule, it is stipulated that at least the inventory data will add up to 99% of the total use of the material and energy of the product life cycle studied and 95% of the use of material and energy per module excluding factory diffuse materials.

3.7. Additional environmental information

There are no plus 0,1% of dangerous substances in the product according to "Candidate List of Substances of Very High Concern for Authorisation" of the European Agency of Substances and Chemical Preparations.

3.8. Other data

The waste generated in the installation, use and end of life phases are included as no dangerous on the waste european list with the codes LER 17 04 02 Aluminium and 17 02 03 Plastic.

4. TECHNICAL INFORMATION AND SCENARIOS

4.1. Transport from the factory to the building site (A4)

Parameter	Parameter expressed by declared unit
Type and consumption of fuel or vehicle used	Lorry EURO VI 16 Ton - 32 Ton, diesel. Consumption 25 L/100 Km.
Distance	95% Spain 1.300 Km. 5% Europe 2.030 Km.
Utilization of the vehicle (including the empty return)	% assumed in Ecoinvent version 3.4 2017
Density of the transported product	PC 1.200 Kg/m ³ , aluminium 2.700 Kg/m ³ , rubber profiles 900 Kg/m ³ . Packaging products are not included.
Factor of calculating the capacity of the volume used	1

4.2. Installation processes (A5)

Parameter	Parameter expressed by declared unit
Auxiliary materials for installation	Stainless steel screws 0,010 Kg/m2
Water consumption	No water consumption
Consumption of other resources	Scissor lift platform. Diesel. Consumption 0,55 MJ/m2.
Quantitative description of the type of energy and consumption during the installation process	Electric energy (mix of consumption in Spain 2018) Consumption 4,7 x 10E-03 MJ/m2.
Waste in the construction site, generated by the installation of the product (specify types)	Product losses: - PC (1,5%) - Aluminium (1,5%) - Rubber profiles (1,5%) Packaging: - Plastic waste: - Polyethylene (100%) - Polypropylene (100%) - Paperboard (100%) - Wood (100%)
Material output as a result of the waste management processes in the place of installation. For example: collection for recycling, for energetic recovery and final disposal	PC: 42% recycling, 19% energy recovery and 39% dump. Aluminium: 95% recycling and 5% dump. Rubber profiles: 100% dump. Plastic waste: 42% recycling, 40% energy recovery and 18% dump. Paperboard (it is considered like plastic waste). Wood: 100% recycling.
Emissions to the air, ground or water	--

4.3. Reference service life (B1)

Parameter	Parameter expressed by declared unit
Reference service life	25 years
Properties and characteristics of the product	Density 1.200 Kg/m ³ . UV protection by coextrusion.
Requirements (maintenance frequency, ways of using, repair, etc.)	--

4.4. Maintenance (B2), repair (B3), replacement (B4) or refurbishment (B5)

Parameter	Parameter expressed by declared unit
Maintenance, for example: cleaning agent, type of surfactant	Maintenance is not required.
Maintenance cycle	--
Auxiliar materials for the maintenance process	--
Energy input for the maintenance process	--
Net consumption of fresh water during the maintenance or repair process	--
Inspection, maintenance or repair process	--
Inspection, maintenance or repair cycle	--
Auxiliary materials, e.g. lubricant	--
Changing of parts during the product life cycle	1.200 Kg/m ³
Energy input during the process of maintenance, type of energy, e.g. electricity and quantity	--
Energy input during the process of reparation, renovation, replacement, if it is applicable and significant	9,4 x 10E-3
Loss of material during maintenance or repair	--
Service life of the product for inclusion as a basis to calculate the number of times a change is needed in the building	PC 25 years, other products 50 years

4.5. Operational use of energy (B6) and water (B7)

Parameter	Parameter expressed by declared unit
Energy type, for example: electricity, natural gas, use of heat for a district	Neither water nor energy are required
Output power potential of equipments	--
Net consumption of fresh water	--
Characteristic representation (energy efficiency, emissions...)	--

4.6. End of life (C1-C4)

Process	Parameter expressed for declared unit of the components, products or materials
Collection processes	100% of the product
Recycling systems	PC: 42%, aluminium: 95%, stainless steel screws: 100%.
Disposal	PC: 39%, aluminium: 5%, rubber profiles: 100%.

5. ADDITIONAL INFORMATION

The product has:
CE Marking according to the norm EN 16153:2013+A1:2015

6. PCR AND VERIFICATION

This declaration is based on the Document

RCP 100 Productos de construcción en general , versión 2 - 29.02.2016 of DAPconstrucción Program.

Independent verification of the declaration and data according to ISO 14025 and UNE EN15804 + A1

☐ Internal ☒ External

Independent verifier appointed

Ferran Perez, ITeC



Verification date

06 / 04 / 2020

References

- ISO 14025: 2006 Environmental Labels and declarations - Type iii environmental declarations - Principles and procedures
- ISO 14040: 2006 Environmental management - Life cycle assesment - Principles and framework.
- ISO 14044: 2006 Environmental management - Life cycle assesment - Requirements and guidelines.
- UNE EN 15804:2012 + A1 2014 Sostenibilidad en la construcción - Declaraciones ambientales de producto - RCP.

ADMINISTRATOR OF PROGRAMME OPERATOR

Col·legi d'Aparelladors, Arquitectes Tècnics
i Enginyers de l'Edificació de Barcelona
(CAATEEB)
Bon Pastor 5, 08021 Barcelona
www.apabcn.cat

